

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 September 2003 (18.09.2003)

PCT

(10) International Publication Number
WO 03/076757 A1

(51) International Patent Classification⁷: E06B 9/50

(21) International Application Number: PCT/DK03/00152

(22) International Filing Date: 12 March 2003 (12.03.2003)

(25) Filing Language: Danish

(26) Publication Language: English

(30) Priority Data:
PA 2002 00374 12 March 2002 (12.03.2002) DK

(71) Applicant (for all designated States except US): FABER
A/S [DK/DK]; Hestehavevej 22, DK-5852 Ryslinge (DK).

(72) Inventor; and

(75) Inventor/Applicant (for US only): RASMUSSEN, Ken
[DK/DK]; Skjervevej 7A, DK-5750 Rislinge (DK).

(74) Agent: BROCK-NANNESTAD, George; Patent Tactics,
Resedavej 40, DK-2820 Gentofte (DK).


(81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: A MOUNTING DEVICE FOR ROLLER BLINDS

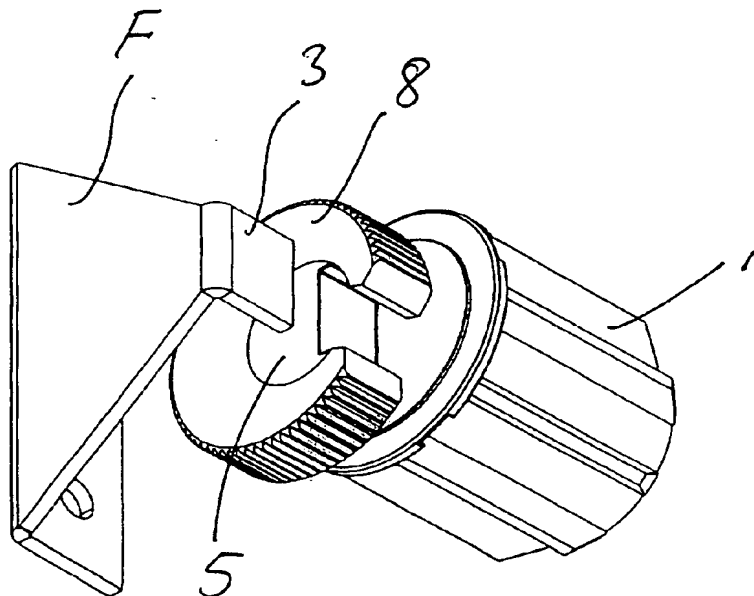

(57) Abstract: A roller blind tube with fabric wound around it is mounted in brackets that have spade-shaped elements (3) provided in the axis. These elements cooperate with oblong holes (2) in terminating plugs (1) in the roller blind tube. According to the invention the oblong holes (2) are opened by rotating eccentrically built rings (8). Hereby the roller blind may be hung on the brackets, whereupon the rings (8) are closed again.

WO 03/076757 A1